



BTA-JAG98

MUSIC STREAMING INSTALL GUIDE FOR 1997*-06 XK (X100) AND 1998-03 XJ (X308) WITH CD CHANGER

Created August 16, 2024
Revised: September 11, 2024

PRODUCT SAFETY & DISCLAIMER

READ ALL INSTRUCTIONS CAREFULLY BEFORE INSTALLING, FAILURE TO DO SO MAY CAUSE PERSONAL INJURY OR DAMAGE TO PRODUCT AND/OR PROPERTY

- This installation guide is provided as a GENERAL installation guide, some vehicles vary and may require additional steps. We do not accept responsibility for third party labor charges or modifications. Exercise due-diligence when installing this product.
- We do not accept any responsibility for vehicle damage or personal injury resulting from the installation of this product.
- Careless installation and operation can result in equipment damage

Requirements:

Functioning CD auto changer in trunk or hatch

Introduction

Portable audio products are everywhere, reflecting demand from active people all over the world to take their music on the road. The BTA-JAG98 (**formerly A2D-JAG98**) is a streaming solution for any A2DP enabled smart device, Steam music apps including turn by turn directions, audio books, Apple music, Deezer and more directly into vehicle audio system via the CD changer port. This module supports Bluetooth 4.2 which ensures high quality audio over Bluetooth. **The required CD changer remains connected and operational.**

The BTA-JAG98 does not support hands-free calls. See our [A2DIY-JAG98](#)

See Frequently Asked question at the end of this guide for more details.

Installation – to CD changer plug in trunk or hatch

Warning: Vehicles must have a fully functioning CD changer which remains connected and operational.

1. Remove carpet trim piece surrounding audio rack (See Fig. 1). If vehicle does not have navigation (**Fig. 1A**); use opening to access the CD changer connecting plug, however; if vehicle has navigation, accessing plug requires unlocking "inner frame":

2. To remove frame:
Remove (2) 7mm bolts on right and left side (See Fig. 1A, 1B)
Remove (2) 7mm bolts from top (See Fig. 1A, 1B)



Fig. 1



Fig. 1A

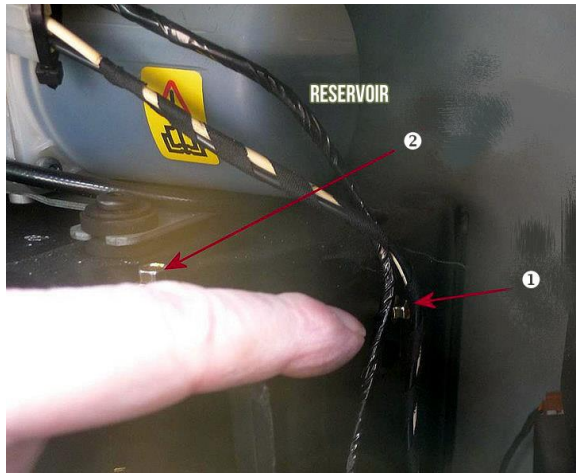


Fig. 1B

3. Pull out the inner frame.
4. Locate short black pigtail cable from CD auto changer (it's the only cable on CD changer body) See Fig. 2



Fig. 2

5. Remove cable from holding tab and disconnect by pulling apart **(DO NOT TWIST OR WIGGLE)** See Fig. 2
6. Once disconnected; female socket leads to CD changer and male plug leads to amplifier or radio - (See Fig. 2-3)



Fig. 3

7. Connect factory male plug to the female connector/socket on adapter harness (See Fig. 3)
(USE EXTREME CAUTION WHEN MAKING THIS CONNECTION)
Align triangle markings on both cables, seat plug into socket and firmly push inwards to connect **(DO NOT TWIST)**



Fig. 4
module

8. Connect right-angle plug from harness (See Fig. 4-5) to CD changer connector/socket (See Fig. 3)

Warning: The right-angle male plug on harness **does not have a (triangular) alignment marking**. Connect to CD pigtail by aligning imaginary (triangular) mark shown in Fig. 5 with (triangular) alignment mark on CD changer connector (See Fig. 6).
DO NOT FORCE CONNECTION OR RISK DAMAGING BOTH.



Fig. 5

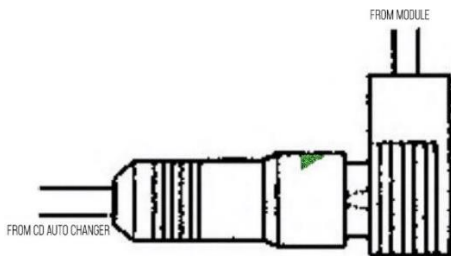


Fig. 6

Noteworthy: Your Jaguar may have multiple Ai-Net cables behind audio rack. To minimize connecting errors, locate single pigtail cable on CD auto changer-- this is the only cable with which you will be working. **Connection to any other cable may result in power loss, low or no audio playback etc.**

8. Crimp RED wire to included Add-a-Fuse Tap circuit (See Fig. 7)


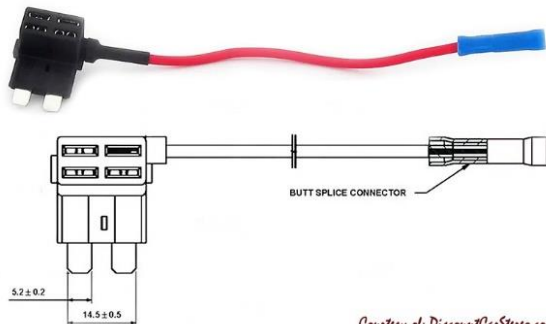


Fig. 7

Courtesy of: DiscountCarStereo.com

9. Insert Add-a-fuse to vehicles fuse box positions **F5 (XJ/R) or F3, F4, F5, F11, F13 (XK/R)** (Or any capable or supplying 12V when ignition key is in ACC/ON positions only)

Note: If aforementioned fuse position is occupied; remove said fuse and insert to vacant slot on Add-a-fuse circuit.

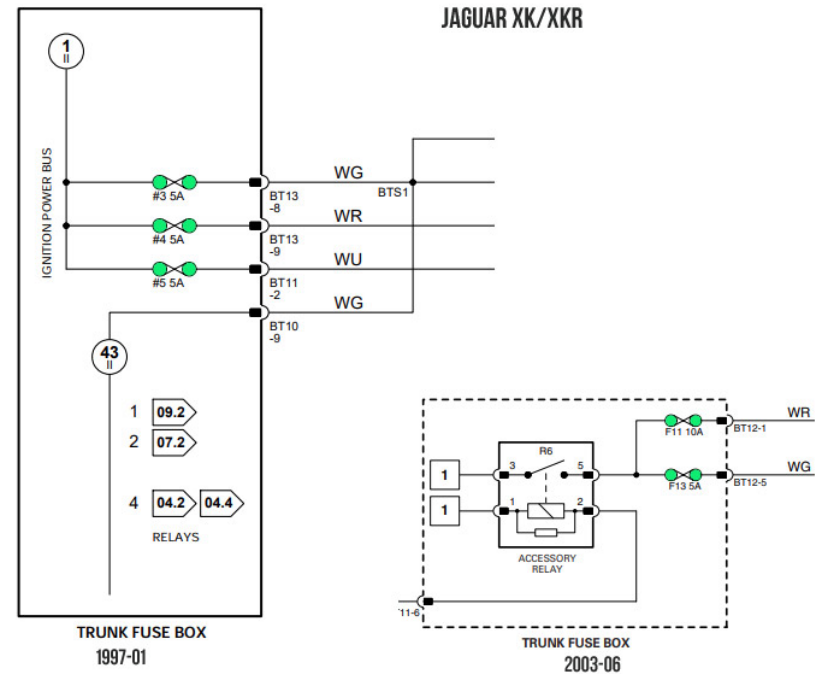

Accessory supply available at: F3, F4, and F5 (pre-2002) and F11, F13 (post 2002) XK/XKR F3, F5 (XJ)

Please start engine, turn radio on and press CD button to test for noise prior to finalizing install.

Note: Fuse F5 (XJ) protects Jaguar cigar lighter sockets and prone to engine noise especially if used as a USB-type charging port.

10. Connect installation harness 16-pin plug (See Fig. 8) to module 16-pin socket (See Fig. 9)

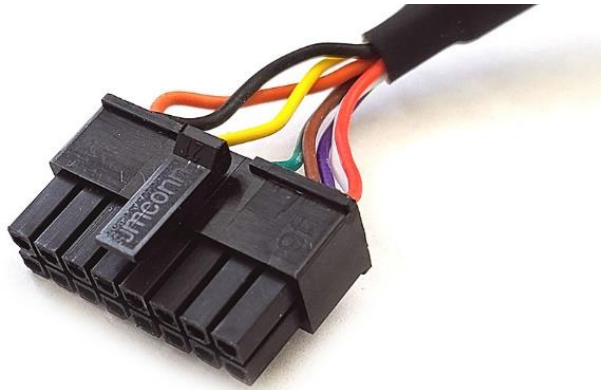


Fig. 8
16-pin plug



Fig. 9
16-pin socket

USB charging port

The integrated USB port (See **Fig. 10**) provides 5V/2A for charging smart devices. Simply connect your devices charging cable directly to USB port or for a custom install; purchase optional dash mount USB extension cable seen in **Fig. 11** and available [here](#).

The USB port is for charging only.



Fig. 10



Fig. 11
optional dash mount extension cable

Pairing

Pairing process varies among devices but basic steps are the same. This process is done upon initial install and will not have to be repeated.

1. Turn Ignition and radio "ON"
On A2DP device: Go to *Settings, Wireless & Networks, Bluetooth Settings*
2. Select *Bluetooth* and turn on.
3. Go to Bluetooth settings
4. Tap Scan (*Search*) for devices.
5. Wait for below Bluetooth device name (see **Fig. 8**) to appear then tap to select.

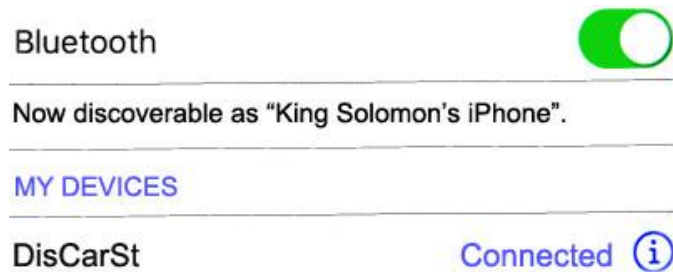


Fig. 8

Steaming operation

1. Turn ignition and radio ON.
2. Press the radio "CD" button. (Module blue LED should glow)



3. Launch audio device streaming application.
4. Set smartphone volume to zero
5. Turn radio volume up 75% (3/4)
6. Increase smartphone volume to where audio begins to distort then decrease slightly until distortion free.
7. Use included wireless remote or device built-in controls to change tracks, adjust device volume, pause etc. (See **Fig. 9**)



Fig. 9

8. To switch over to the CD changer, press remote **Pause/Play** button.
9. To switch back to streaming, press remote **Pause/Play** button.
10. If correct operation is confirmed go ahead and reinstall radio.

Frequent ask questions & troubleshooting

- 1. Can I pair more than one device to Bluetooth module?**
YES; pairing multiple devices is possible, however only one device can connect at a time. Disconnect first device to allow pairing to another device.
- 2. How do I listen to CD's?**
To listen to CD's press PAUSE/PLAY on remote control or manually pause playback on smart device.
- 3. How good is sound quality playback from this module?**
Without starting a debate about wired vs. wireless; we will answer based on our own experience: The BTA-JAG98 sounded very good on our XJ Alpine Premium system.
- 4. Can I install the BTA-JAG98 module at the radio?**
NO; the BTA-JAG98 module connects to CD changer plug in trunk or hatch.
- 5. Please explain vehicle application and where does module connect?**
The BTA-JAG98 is specific to the following Jaguar vehicles:
1998-03 (x308) (To Ai-net CD changer plug in trunk)
Late 1997*-06 (x100) (To Ai-net CD changer plug in hatch)
FYI: early 1997 XK8 radio display screen is on the top right, whereas on later models (1998-99), the radio display is at the center.
- 6. Will I be able to make/receive phone calls using this module?**
NO. The BTA-JAG98 supports music streaming. **Not for hands-free calls.**
Purchase our [A2DIY-JAG98](#) instead.
- 7. I hear clicking sounds as I use my device, how can I stop this?**
Go to device settings and disable touch sounds.
- 8. My module does not always pair when entering vehicle. How to I remedy this?**
Ensure module has not already paired with another device. Cycle ignition or disable/enable Bluetooth on audio device.
- 9. It is possible to change Bluetooth ID name to my own?**
This may be possible on some devices but not so on recent iPhones:
Make sure module is powered on and connected.
Go to Phone settings and tap Bluetooth.
Tap ⓘ next to DISCARST, then tap Name
Enter a new name (e.g. Jaguar-BT etc.) tap Done on keyboard, then tap <
The custom name given now appears in Bluetooth settings of your device.

- 10. Only one side plays, or radio "CD" button does nothing. What may cause this?**

Ensure factory plug is fully inserted to module socket (Refer to page 6). Also check pins inside module female socket. These may need "adjusting" especially if factory plug terminals have memorized position especially if never disconnected and are not "flexing"
Use below image as reference and "flex" pin holder so to allow a firmer connection to pins in factory plug. This is a one-time adjustment that will not have to be repeated:



- 11. Playback is distorted, how do I fix this?**
If playback is distorted it's likely because audio device volume setting is too high. To fix, turn the radio volume up to comfortable level, then lower volume on device until it no longer distorts.
- 12. Will Jaguar radio display song tittle, name or playlist?**
NO. Song/track information not displayed on Jaguar radio screen. This information will be available on audio device display or touch screen.

13. **Bluetooth ID name is not showing up on my device. What must I check?**

The main reason module ID is not displayed on smart device is because module has no power. Ensure power is reaching module by testing for 12V on accessory wire at a point beyond crimp (if using included Add-a-fuse" circuit). If crimp is compromised, power will not reach module. To fix simply cut blue crimp and splice red wires after which the module should power up and available for pairing.

Appendix: Troubleshooting Bluetooth connection

Check your phone's Bluetooth connection

1. Open the Bluetooth Settings

Make sure Bluetooth is enabled on phone.

2. Check the device's current connections

If you've previously paired Bluetooth device to another device that is in range, try disconnecting from that device before pairing with a new one.

3. Check the Bluetooth range

In order to connect, most Bluetooth devices need to be within 10 meters from the phone. Make sure the devices are close enough; otherwise, they will not connect.

4. Restart both devices

If possible, restart Bluetooth device. This can help fix minor issues and may help the Bluetooth device connect again.

5. Try connecting to a Bluetooth device

From the Bluetooth settings menu, tap Scan, and then select your desired Bluetooth device from the list of available devices. Follow the prompts to complete the pairing.

- Remove any third-party cases or covers that may interfere with wireless connections.

6. Clear the Bluetooth cache.

You can clear the Bluetooth data cache on the phone or tablet to completely reset Bluetooth. To do this, open **Settings > Apps > More options** (the three vertical dots) > **Show system apps > Bluetooth > Storage > Clear data**. Tap **OK** to confirm.

7. Check both devices for software updates.

Check to see if your phone or tablet has any available software updates and update it as needed. Also, make sure to check if your Bluetooth device needs any software or firmware updates. These are often overlooked. You may need to contact the manufacturer for instructions if you have a third-party device.

*Late 1997 XK with Ai-NET plug (not for early 1997 XK8 with 8-pin DIN plug)

Disclaimer

- This product has no affiliation with Jaguar
- We're not liable for misuse of this product.
- We recommend professional installation

For additional support email support@discountcarstereo.com

© 1995-Sep-24 Discount Car Stereo, Inc. All rights reserved. Information in this document is subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.